




# ComAnt<sup>®</sup> Communications Antennas

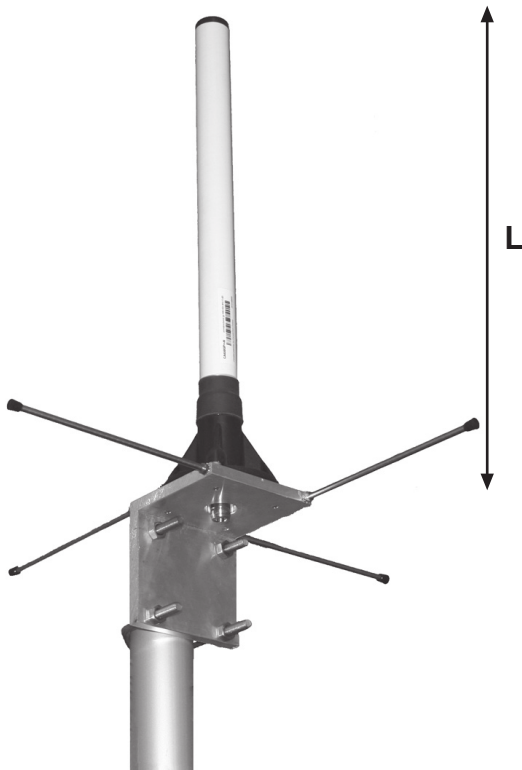

## FREQUENCY INDEPENDENT DATA

Description: omnidirectional ground plane  
 Frequency: 401-409 MHz, 406-414 MHz,  
 416-424 MHz, 426-434 MHz,  
 431-439 MHz, 436-444 MHz,  
 441-449 MHz, 446-454 MHz,  
 456-464 MHz, 465-475 MHz,  
 860-880 MHz  
 Impedance: 50 ohm  
 Gain: 6 dBi  
 Polarization: vertical  
 Connector: N-female/TNC-female  
 VSWR: < 1.5  
 Radome: UV resistant fiberglass, white /  
 PE, black,  
 PU foam filling  
 Radiator: copper  
 Attachment: Ø 35-60 mm, aluminium alloy  
 bracket, stainless steel V-  
 bolts and self locking nuts  
 Lightning  
 protection: DC-short circuited, -grounded  
 Temperature: -40° - +80°C  
 IP: 67

RADIATION PATTERN

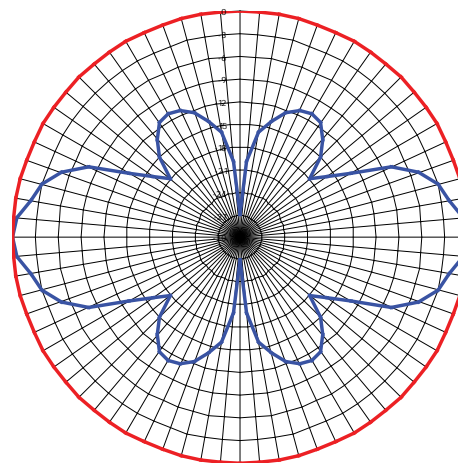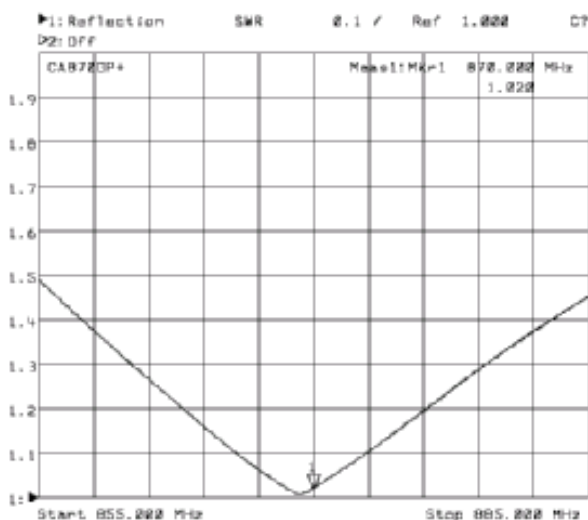

— E dB — H dB

**CompleTech**  
 ComAnt<sup>®</sup>-antennas by CompleTech, Finland

**CAGP+ OMNIDIRECTIONAL GROUND PLANE**